

FLF Fogger Low Flow



Product Features

Finest droplets
(Average droplet size: 70 micron)

Applications

Greenhouse
Cutting propagation and germination
Humidity and evaporative climates

Product Options

Flow rates (50 psi):
Light blue nozzle: 1.43 gph
Dark blue nozzle: 2.8 gph

Operating Guidelines

Recommended operation pressure range:
50- 70 psi

Opening pressure (HP): 51 psi
Closing pressure (HP): 20 psi

Filtration requirements:

| Gph | Microns | Mesh |
|-----|---------|------|
| All | 100 | 150 |

Growers choose the FLF (Fogger - Low Flow) for irrigation and as a method to alter the humidity and the evaporative climate in both greenhouses and high tunnels. The FLF is so versatile that it can be used as part of a cooling system in husbandry or for irrigation in both cutting propagation and seed germination.

Because of the unique vortex flow, the FLF delivers the finest droplets, even at low flow rates. Team up the FLF with an anti-leak mini-valve and you've got a system with some serious control. Once the irrigation system is shut off, there is no more flow through the fogger.

FLF Fogger Low Flow

FLF Fog Spray - Product Specifications


| Description | Nozzle (gph) | Flow Rate (gph) | Con. | Item Number |
|--------------|-----------------|--------------------|--------------|-------------|
| Fogger 2-Way | Light Blue | 3.1 | Conic Female | 101008234 |
| Fogger 4-Way | Light Blue | 6.1 | Conic Female | 101003664 |
| Fogger 4-Way | Dark Blue | 11.3 | Conic Female | 101009819 |

FLF Fog Spray with HP Anti-Leak Valve - Product Specifications


| Description | Special Feature | Nozzle (gph) | Flow Rate (gph) | Con. | Item Number |
|---------------|--------------------|-----------------|--------------------|--------------|-------------|
| Fogger Single | HP Anti-Leak Valve | Light Blue | 1.5 | Barbed | 101003679 |
| Fogger 2-Way | HP Anti-Leak Valve | Light Blue | 3.1 | Conic Female | 101003675 |
| Fogger 4-Way | HP Anti-Leak Valve | Light Blue | 6.1 | Conic Female | 101003673 |
| Fogger 4-Way | HP Anti-Leak Valve | Dark Blue | 11.3 | Conic Female | 101003671 |

Fogger Single (barbed)


Assembled directly into PE lateral

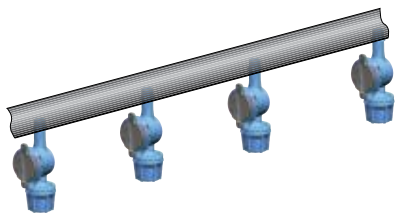

Fogger 2-Way assemblies

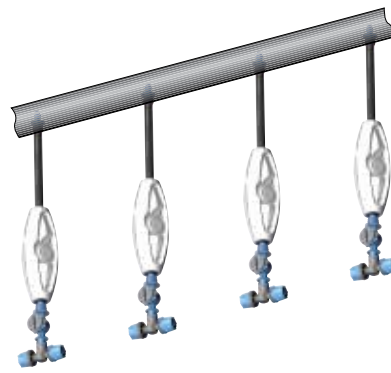

Fogger 4-Way assemblies

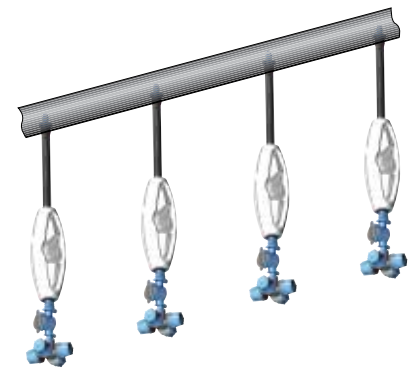

Installation Options

The adaptors are mounted onto the conic outlet of the anti-leak mini-valve.

For direct insertion into PE laterals, use the anti-leak mini-valve with barbed inlet.

For direct insertion into PVC laterals, add 4x7 mm (.16" x .28") grommet to the barbed inlet of the mini-valve.



Anti-leak H mini valve (High pressure)

