

Ro-Drip Drip Tape



Product Features

- Plug resistant design
- Expanding flow channel
- Vortex flow action

Applications

- Surface or subsurface

Product Options

- Diameters: 5/8" and 7/8"
- Wall thickness: 5-10 mil
- Flow rates: 0.25- 1.0 gpm/ 100 ft.
- Roll weight: 67 - 73 lbs.
- Rolls per pallet: 16

Operating Guidelines

- Recommended operating pressure: 8 PSI
- Flushing pressure: According to diameter and wall thickness (Listed in product information on next page).

Filtration Requirements (g/h/dripper)

gph	Micron	Mesh
<0.170	80	200
0.170-0.320	100	150
>0.320	130	120

Ro-Drip Drip Tape provides a reliable, cost-effective solution for all your sub-surface and above ground drip irrigation needs. Ro-Drip Drip Tape is specifically engineered to deliver uniform flow rates while addressing the most difficult maintenance issue faced by drip growers today: blockage during high contaminant conditions.

Our patented Ro-Drip design employs two independent anti-plugging systems: Vortex Flow Action, which resists clogs by keeping particulate in suspension; and our exclusive Expanding Flow Channel, which reacts to blockages by actually changing shape, often purging even the toughest particulate build-up. Additionally, our patented manufacturing process creates a precision-molded flow channel with a large cross section, which can pass larger particulate and deliver the uniform flow rates you demand.




Ro-Drip - Product Specifications

Description	Wall Thickness	Spacing	Flow Rate (per 100 ft.)*		Flow Rate /Dripper	Max. Length of Run **	Flushing Pressure	Roll length	Roll Weight	Item Number
			(gpm)	(gph)						
5/8	5	4	0.67	40	0.133	413	12	12,500	73	101001195
5/8	5	8	0.33	20	0.133	627	12	12,500	73	101001198
5/8	5	8	0.45	27	0.180	531	12	12,500	73	101001199
5/8	5	8	0.67	40	0.267	413	12	12,500	73	101001200
5/8	5	12	0.25	15	0.150	754	12	12,500	73	101001201
5/8	5	12	0.40	24	0.240	574	12	12,500	73	101001202
5/8	6	4	0.67	40	0.133	413	15	10,000	70	101001203
5/8	6	4	1.00	60	0.200	318	15	10,000	70	101001204
5/8	6	8	0.33	20	0.133	627	15	10,000	70	101001209
5/8	6	8	0.45	27	0.180	531	15	10,000	70	101001210
5/8	6	8	0.67	40	0.267	413	15	10,000	70	101001211
5/8	6	12	0.25	15	0.150	754	15	10,000	70	101001213
5/8	6	12	0.40	24	0.240	574	15	10,000	70	101001214
5/8	8	4	0.67	40	0.133	413	15	7,500	67	101001218
5/8	8	4	1.00	60	0.200	318	15	7,500	67	101001220
5/8	8	8	0.33	20	0.133	627	15	7,500	67	101001223
5/8	8	8	0.45	27	0.180	531	15	7,500	67	101001224
5/8	8	8	0.67	40	0.267	413	15	7,500	67	101001228
5/8	8	12	0.25	15	0.150	754	15	7,500	67	101001229
5/8	8	12	0.40	24	0.240	574	15	7,500	67	101001232
5/8	8	16	0.33	20	0.267	627	15	7,500	67	101001234
5/8	10	12	0.40	24	0.240	574	20	6,000	68	101001237
7/8	8	8	0.67	40	0.160	686	15	5,700	65	101001263
7/8	8	12	0.25	15	0.150	1214	15	5,700	65	101001264
7/8	8	12	0.40	24	0.240	938	15	5,700	65	101001265
7/8	10	12	0.25	15	0.150	1214	20	5,000	73	101001267

*@ 8 PSI **Max. Length of run: 0% Slope, 90% EU, @ 8 PSI

Flow Versus Pressure Chart: Ro-Drip Drip Tape

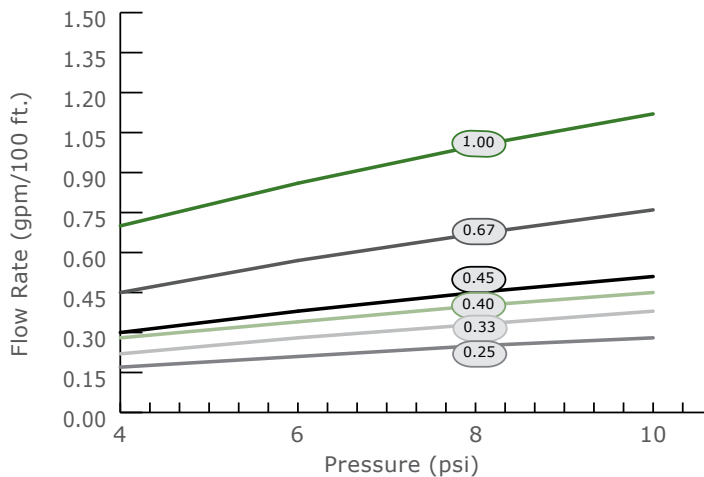

Suggested Use of Ro-Drip Drip Tape

- 5 mil** - Used where rocks and pests are at a minimum and where cost is an important factor. Can be used on the surface or in sub-surface applications with mulch.
- 6 mil** - Used where rocks and pests are at a minimum and where cost is an important factor. This tape is more resilient than 5 mil and more cost effective than 8 mil.
- 8 mil** - Recommended for new drip tape users seeking a thin walled yet durable tape and for growers who double crop or use their tape for long season crops.
- 10 mil** - Added thickness makes this tape more resistant to mechanical damage from rocky soils and insects than its thinner walled counterparts. This product is well suited for multi-season use in surface or sub-surface applications.



Rivulis.com



This literature has been compiled for worldwide circulation and the descriptions, photos, and information are for general purpose use only. Please consult with an irrigation specialist and technical specifications for proper use of products. Because some products are not available in all regions, please contact your local dealer for details. Rivulis reserves the right to change specifications and the design of all products without notice.

RIV_DS_Ro-Drip_R4_EN_W17_0358