

EOLOS COMPACT

MAXIMIZE YOUR FARM WITH LONGER RUN-LENGTHS



EOLOS COMPACT

Thin Wall Drip Line

Drip Line	EOLOS COMPACT
Flow Rates (l/h)	0.6, 1.0, 1.4, 2.2
Standard Emitter Spacings (cm)	10, 15, 20, 30, 33, 40
Nominal Drip Line Diameter (mm)	16 (ID)/17 (OD) 22 (ID)/23 (OD)
Drip Line Wall Thickness (mil)	16 mm: 5 (0.135 mm), 6 (0.150 mm), 8 (0.200 mm), 10 mil (0.250 mm) 22 mm: 8 (0.200 mm), 10 mil (0.250 mm)
Outlet	Hole / Flap outlet



MAXIMIZE: FARMING

Have you ever wondered why some drip lines can work for longer run lengths than others?

The maximum distance a drip line can function is dependent on a number of factors including the exponent (correlation between flow output and pressure) and the kd value (friction caused by each emitter in the drip line). The lower the exponent and the kd value, the further you can run your drip irrigation system while still maintaining a high standard of irrigation uniformity.

Eolos Compact's design minimizes friction loss through its small design, and its uniquely engineered flow path that minimizes exponent. In other words, Eolos Compact allows you to achieve longer distances per row while still maintaining high uniformity.

Unique emitter design for high uniformity over longer distances



MAXIMUM: RUN LENGTHS COMPARISON



Calculations based on 1 bar pressure, flat ground and 10% maximum flow variation.

MAXIMIZE: Potential Benefits For Your Farm

- Achieve longer-run lengths with a smaller diameter tube – Save on installation costs
- Irrigate longer rows for more efficient farming operations – Longer rows, fewer tractor turns
- Greater uniformity of irrigation over longer run lengths – More consistent crop yields

DESIGNED TO PERFORM

70% Smaller Than Eolos Classic Emitter


Not only does a small emitter help reduce water friction in the drip line, a smaller emitter is easier to install with less risk of being caught on installation equipment.

Large cross section labyrinth

With up to 54% larger labyrinth than leading competitor product, the large labyrinth in every emitter helps Eolos Compact perform when other products clog.

Trusted Worldwide

From South America, to USA, to Europe, growers around the world trust Eolos Compact. Did you know, the amount of Eolos Compact sold each year would wrap around the world 42 times?

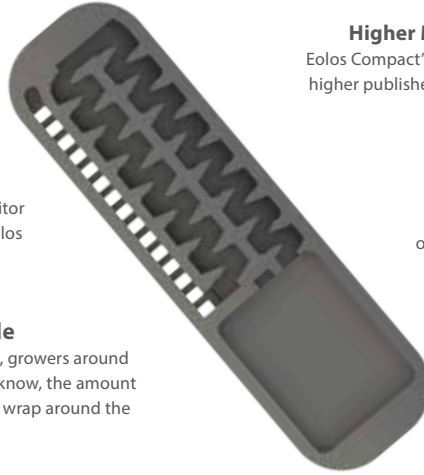

Higher Maximum Operating Pressure

Eolos Compact's durable construction allows for up to 20% higher published maximum operating pressure compared to competitive product.

Printed White Stripes On Tube

For easy emitter identification Eolos Compact features optional two white stripes to identify direction for correct installation.

Flap Outlet Option

Eolos Compact has a flat outlet option that helps prevent soil ingestion during system shut-down – a great advantage for buried applications.

EOLOS COMPACT Technical Data

Nominal Ø	Wall Thickness		Internal Ø	Outside Ø	Nominal Flow Rate at 1.0 bar	Maximum Operating Pressure	Roll Length (according to emitter spacing)	Spacing between Emitters (cm)							
	(mil)	(mm)						15	20	25	30	40	50	60	75
(mm)			(mm)	(mm)	(l/h)	(bar)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	
16	5	0.135	16.1	16.37	0.6	0.8	3100 (10 cm)	126	153	178	201	243	282	317	368
					1.0		3200 (15 cm)	93	114	132	149	181	210	236	274
					1.4		3300 (20 cm)	77	93	107	121	146	169	190	220
					2.2		3500 (25 cm)	58	70	81	91	110	128	143	166
	6	0.150		16.40	0.6	1.0	2600 (10 cm)	126	154	179	202	244	283	319	370
					1.0		2700 (15 cm)	95	115	134	151	183	212	239	277
					1.4		2800 (20 cm)	77	94	109	122	148	171	192	223
					2.2		2900 (25 cm)	59	71	82	92	112	130	146	169
	8	0.200	16.50	0.6	1.2	2500 (10 cm)	128	156	181	205	248	288	324	376	
				1.0		2600 (15 cm)	99	120	140	158	191	222	250	290	
				1.4		2700 (20 cm)	78	94	110	123	149	173	194	224	
				2.2		2800 (25 cm)	59	72	83	94	113	131	148	170	
	10	0.250	16.60	0.6	1.4	2000 (10 cm)	126	153	178	201	243	282	318	368	
				1.0		2200 (15 cm)	100	122	142	160	194	225	254	294	
				1.4		2300 (20 cm)	80	97	112	126	152	176	199	230	
				2.2		2400 (25 cm)	60	72	84	94	114	132	149	173	
22	8	0.200	22.2	22.60	0.6	1.0	1900 (15 cm)	219	267	312	353	428	496	560	649
					1.0		2000 (20 cm)	166	202	236	266	323	375	424	491
					1.4		2100 (25 cm)	133	161	187	211	255	295	332	384
					2.2		2200 (30< cm)	101	122	142	160	193	224	252	291
	10	0.250	22.70	0.6	1.3	1300 (15 cm)	221	270	314	355	431	500	565	654	
				1.0		1400 (20 cm)	174	212	247	280	339	394	445	515	
				1.4		1500 (25 cm)	135	163	189	214	258	299	337	389	
				2.2		1600 (30< cm)	103	124	144	163	196	228	256	296	

MAXIMIZE: CONNECTORS

When it comes to drip line connectors there are two things that matter most – ease of installation and reliability.

Rivulis Fast Ring Drip Line Connectors live up to their name – FAST! In-field they are quick to install with a large, easy-to-tighten nut that fixes effortlessly to your drip line.



Once they are installed, you can have the confidence that they will perform. Each Fast Ring Connector is designed for maximum adhesion. In addition, high quality UV resistant construction ensures that your connector will last season after season.

EOLOS COMPACT

Thin Wall Drip Line

“By achieving longer run lengths using Eolos Compact, we significantly reduced our labor costs for installation in our corn crop”.

Veysel Dursun, Manisa / Selimşahlar



This literature has been compiled for worldwide circulation and the descriptions, photos, and information are for general purpose use only. Please consult with an irrigation specialist and technical specifications for proper use of products. Because some products are not available in all regions, please contact your local dealer for details. Every effort has been used to ensure that product information, including data sheets, schematics, manuals and brochures are correct. However, information should be verified before making any decisions based on this information. Eurodrip reserves the right to change specifications and the design of all products without notice.