

## FLF Foggers



## Rivulis FLF Foggers: Improve your greenhouse environment for your plants to thrive

- Use foggers to reduce the air temperature and/or to increase the air humidity
- FLF delivers a fine mist with an average droplet size of 70 microns
- Available in single, two and four outlet configurations

# Product Information

Technical Data	
Operating pressure range	3.5 - 5.0 bar
Pressure (for flow rate calculation)	3.5 bar
Sealing pressure	1.4 bar
Filtration requirement	100 micron / 150 mesh

## Recommended installation

FLF with anti-leak valve, microtube, stabilizing weight

## Anti-leak valves


Use FLF with a Rivulis anti-leak H (high pressure) mini valve to prevent drainage at shut off. Remember to install the anti-leak valve in the direction indicated by the arrow on the valve.




Rivulis 4-Way FLF Fogger with anti-leak valve, weight, microtube and connector

# FLF Foggers | Outlet Options


## Single Outlet



## 2 - Outlet



## 4 - Outlet

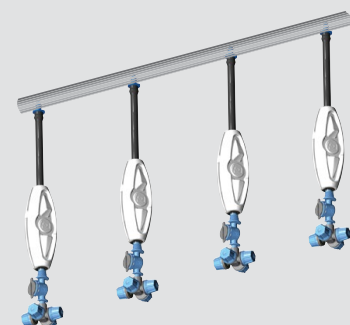


# Product List

Rivulis FLF Foggers   Individual Units						
Product Description	Flow Rate (lph)	Nozzle Color	Anti Leak	Product Number	Quantity (bag)	Quantity (box)
FLF 1 outlet   5.4 lph   Barb anti leak	5.4	Light Blue	H Barb x conic female	201000197	1000	3000
FLF 1 outlet   5.4 lph   Conic M anti leak	5.4	Light Blue	H Conic male x Conic female	101003679	1000	3000
FLF 1 outlet   10.5 lph   Barb anti leak	10.5	Dark Blue	H Barb x conic female	101003674	1000	3000
FLF 1 outlet   10.5 lph   Conic M anti leak	10.5	Dark Blue	H Conic male x Conic female	101003680	1000	3000
FLF 2 outlet   5.4 lph	5.4 x 2	Light Blue	No anti leak	101008234	500	4000
FLF 2 outlet   10.5 lph	10.5 x 2	Dark Blue	No anti leak	101009818	500	4000
FLF 2 outlet   5.4 lph   Barb anti leak	5.4 x 2	Light Blue	H Barb x conic male	101003677	250	1500
FLF 2 outlet   5.4 lph   Conic M anti leak	5.4 x 2	Light Blue	H Conic female x Conic male	101003675	250	1500
FLF 2 outlet   10.5 lph   Barb anti leak	10.5 x 2	Dark Blue	H Barb x conic male	101003678	250	1500
FLF 2 outlet   10.5 lph   Conic M anti leak	10.5 x 2	Dark Blue	H Conic female x Conic male	101003676	250	1500
FLF 4 Outlet   5.4 lph	5.4 x 4	Light Blue	No anti leak	101003664	500	2000
FLF 4 Outlet   10.5 lph	10.5 x 4	Dark Blue	No anti leak	101009819	500	2000
FLF 4 outlet   5.4 lph   Barb anti leak	5.4 x 4	Light Blue	H Barb x conic male	201000198	250	1000
FLF 4 outlet   5.4 lph   Conic M anti leak	5.4 x 4	Light Blue	H Conic female x Conic male	101003673	250	1000
FLF 4 outlet   10.5 lph   Barb anti leak	10.5 x 4	Dark Blue	H Barb x conic male	101003672	250	1000
FLF 4 outlet   10.5 lph   Conic M anti leak	10.5 x 4	Dark Blue	H Conic female x Conic male	101003671	250	1000



## Rivulis FLF Foggers | Complete Assemblies

Product Description	Flow Rate (lph)	Nozzle Color	Features	Product Number	Quantity (bag)
FLF 1 outlet   5.4 lph   with anti leak, 35 cm tube, weight & 4x7 coupling	5.4	Light Blue	H Conic male x Conic female	101003683	250
FLF 1 outlet   10.5 lph   with anti leak, 35 cm tube, weight & 4x7 coupling	10.5	Dark Blue	H Conic male x Conic female	101003684	250
FLF 2 outlet   5.4 lph   with anti leak, 35 cm tube, weight & 4x7 coupling	5.4 x 2	Light Blue	H Conic female x Conic male	101003685	250
FLF 2 outlet   10.5 lph   with anti leak, 35 cm tube, weight & 4x7 coupling	10.5 x 2	Dark Blue	H Conic female x Conic male	101003686	250
FLF 4 outlet   5.4 lph   with anti leak, 35 cm tube, weight & 4x7 coupling	5.4 x 4	Light Blue	H Conic female x Conic male	101003687	250
FLF 4 outlet   10.5 lph   with anti leak, 35 cm tube, weight & 4x7 coupling	10.5 x 4	Dark Blue	H Conic female x Conic male	101003688	250

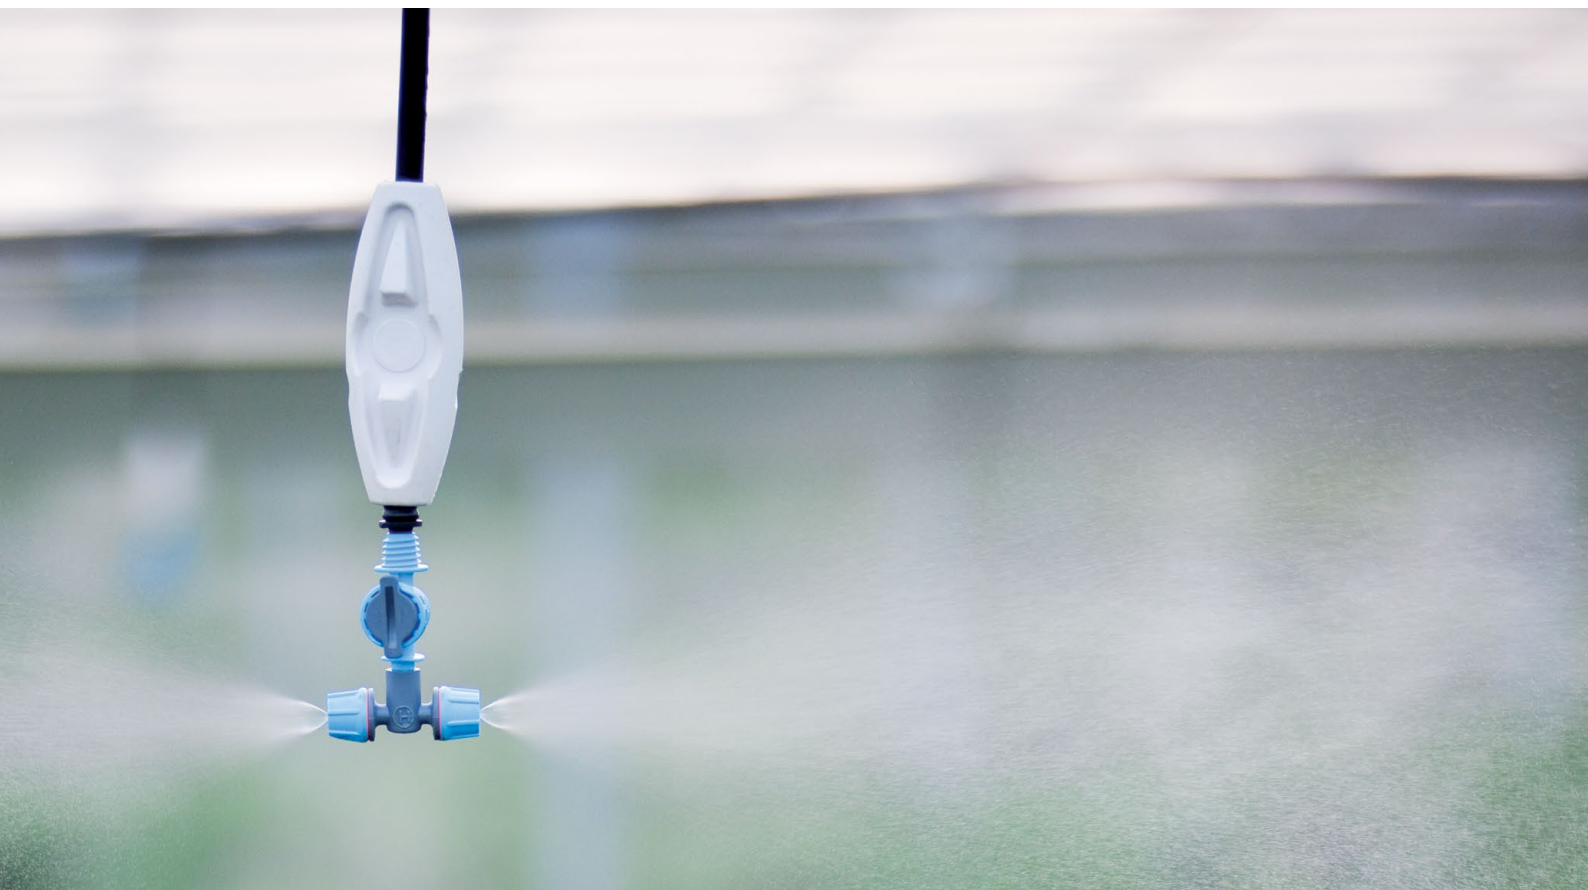

Case study outcomes are for information purposes only and actual results may vary. This literature has been compiled for worldwide circulation and the descriptions, photos, and information are for general purpose use only. Please consult with an irrigation specialist and technical specifications for proper use of Rivulis products. Because some products are not available in all regions, please contact your local dealer for details. Rivulis reserves the right to change specifications and the design of all products without notice. Every effort has been used to ensure that product information, including data sheets, schematics, manuals and brochures are correct. However information should be verified before making any decisions based on this information.